



I115SS



ING. O. FIORENTINI s.r.l.

"THE BEST IN FLOOR MACHINES"
a fiorentini@ingfiorentini.it sales@ingfiorentini.it
www.ingfiorentini.it

FILIALI:
20132 MILANO - Fax. 02-2592779
Via Palmanova 211/a - Tel. 02-27207783 - 2564810
00155 ROMA - Fax. 06-22754075
Via Carlo Carrà 13 - Tel. 06-22754040-2275060


STABILIMENTO:
50030 PIANCALDOLI (FI) - Fax. 055-817144
Loc. Rombola - Tel. 055-8173610

Distributed by:



I 115SS

MODEL		I 115SS
TECHNICAL SPECIFICATION		
Scrubbing width	mm	1150
Cleaning capacity up to	m ² /h	7000
Operating range	h	3 (operation in combined)
Tank capacity gas/diesel	l	/
Recovery tank capacity	l	210
Solution tank capacity	l	220
Dirty container capacity	l	210
Side brushes sweep width	mm	1450
Filtering surface	m ²	6
TECHNICAL DATES		
Mechanical drive (front/rear)		Hydraul. rear
Mechanical drive (drive wheel/diff./hydrost.)		n° 1 motor hydraulic
Forward speed	km/h	0.6
Max. slope	%	10
Water lift	mm	1800
Brush pressure	kg	180
Noise level	rpm	78
Turning radius	dB	1900
ELETTRIC DATES		
Power	v	36
Washing tank vacuum motor	w	2x36v 850w
Sweeping tank vacuum motor	w	1x36v 350w 3500rpm
Brush motor	w	3x36v 900w
Filter shaker motor	w	1x 36v 4.3 A 7000rpm
Traction motor		Hydraulic GLT 250
Voltage		Large case battery 36v 630Amp/h
DIMENSION & WEIGHT		
Lenght	mm	2100
Width without brush covers	mm	1200
Width with brush covers	mm	1230
Height with roll bar	mm	1850
Height without roll bar	mm	1420
Number of brushes and diameter	mm	3 x Ø380
Main broom	mm	850 x Ø300
Front side brushes		2 x Ø400
Squeegee width	mm	1350
Weight of the machine	kg	960
CHARACTERISTICS FUNCTIONAL		
Lifting of side sweeping brushes		electric
Lifting of central sweeping brush		electric
Lifting of washing brushes		electric
Lifting of squeegee		electric
Shifting of washing trolley		electric
Service brake		Hydraulic to pedal
Parking brake		Mechanic to lever

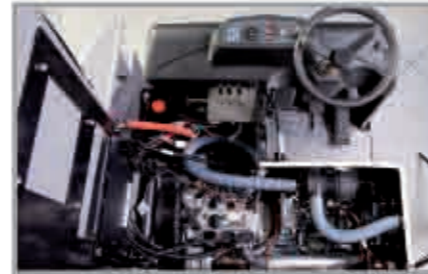

I 115SS

MODEL		I 115SSG - I 115SSD
TECHNICAL SPECIFICATION		
Scrubbing width	mm	1150
Cleaning capacity up to	m ² /h	8050
Operating range	h	/
Tank capacity gas/diesel	l	20
Recovery tank capacity	l	210
Solution tank capacity	l	220
Dirty container capacity	l	210
Side brushes sweep width	mm	1450
Filtering surface	m ²	6
TECHNICAL DATES		
Mechanical drive (front/rear)		Hydraul. rear
Mechanical drive (drive wheel/diff./hydrost.)		n° 1 motor hydraulic
Forward speed	km/h	0.7
Max. slope	%	10
Water lift	mm	1800
Brush pressure	kg	180
Noise level	rpm	85
Turning radius	dB	1900
ELETTRIC DATES		
Power	v	Gas (GPL)/Diesel
Washing tank vacuum motor	w	2x36v 850w
Sweeping tank vacuum motor	w	1x36v 350w 3500rpm
Brush motor	w	OMM 3 IDRA.
Filter shaker motor	w	1x 36v 4.3 A 7000rpm
Traction motor		Idraulico GLT 250
Voltage		Gas (GPL)/Diesel
DIMENSION & WEIGHT		
Lenght	mm	2100
Width without brush covers	mm	1200-1230
Width with brush covers	mm	1230
Height with roll bar	mm	1850
Height without roll bar	mm	1420
Number of brushes and diameter	mm	3 x Ø380
Main broom	mm	850 x Ø300
Front side brushes		2 x Ø400
Squeegee width	mm	1350
Weight of the machine	kg	960
CHARACTERISTICS FUNCTIONAL		
Lifting of side sweeping brushes		electric
Lifting of central sweeping brush		electric
Lifting of washing brushes		electric
Lifting of squeegee		electric
Shifting of washing trolley		electric
Service brake		Hydraulic to pedal
Parking brake		Mechanic to lever

