

N 45/53




fiorentini




N 45/53

MODEL TECHNICAL SPECIFICATION		N45B	N45E	N53B	N53E	N45B new	N53B new
Scrubbing width	mm	480	480	530	530	480	530
Cleaning capacity up to	m ² /h	1920	1920	2120	2120	1920	2120
Operating range	h	2	/	2	/	2	2
Solution tank capacity	l	40	40	40	40	40	40
Recovery tank capacity	l	33	33	33	33	33	33
TECHNICAL DATES							
Mechanical drive (front/rear)		front	front	front	front	front	front
Forward speed	km/h	4	4	4	4	4	4
Max. slope	%	5	5	5	5	5	5
Water lift	mBar	1000	1000	1000	1000	1000	1000
Brush pressure	kg	15	15	15	15	15	15
Noise level	dB	73	73	73	73	73	73
ELETTRIC DATES							
Power	v	24	220	24	220	24	220
Vacuum motor	w	500	550	500	550	500	500
Brush motor	w	500	750	500	750	500	750
Traction motor	w	130	130/OPT.	130	130/OPT.	130	130/OPT.
Voltage	(Ah in C20)	2x12v 157Amp	/	2x12v 157Amp	/	2x12v 157Amp	2x12v 157Amp
DIMENSION & WEIGHT							
Length	mm	1140	1140	1140	1140	1140	1140
Width	mm	550	550	550	550	550	550
Height	mm	980	980	980	980	980	980
Number of brushes and diameter	mm	1x480	1x480	1x530	1x530	1x480	1x530
Squeegee width	mm	780	780	780	780	780	780
Weight of the machine (without batteries/water/operator)	kg	83	100	83	100	83	83
Weight of the batteries (approx.)	Kg	72	/	72	/	72	72

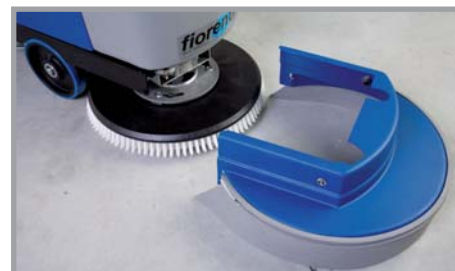

ING. O. FIORENTINI s.r.l.

“THE BEST IN FLOOR MACHINES”
 afiorentini@ingfiorentini.it sales@ingfiorentini.it
 www.ingfiorentini.it

Il punto Immagine 0547.58759

FILIALI:
 20132 MILANO – Fax. 02-2592779
 Via Palmanova 211/a – Tel. 02-27207783 - 2564810
 00155 ROMA – Fax. 06-22754075
 Via Carlo Carrà 13 – Tel. 06-22754040-2275060

STABILIMENTO:
 50030 PIANCALDOLI (FI) – Fax. 055-817144
 Loc. Rombola - Tel. 055-8173610

Distributed by:

